
EX-1174

USB 2.0 Products





Anwendung / Application

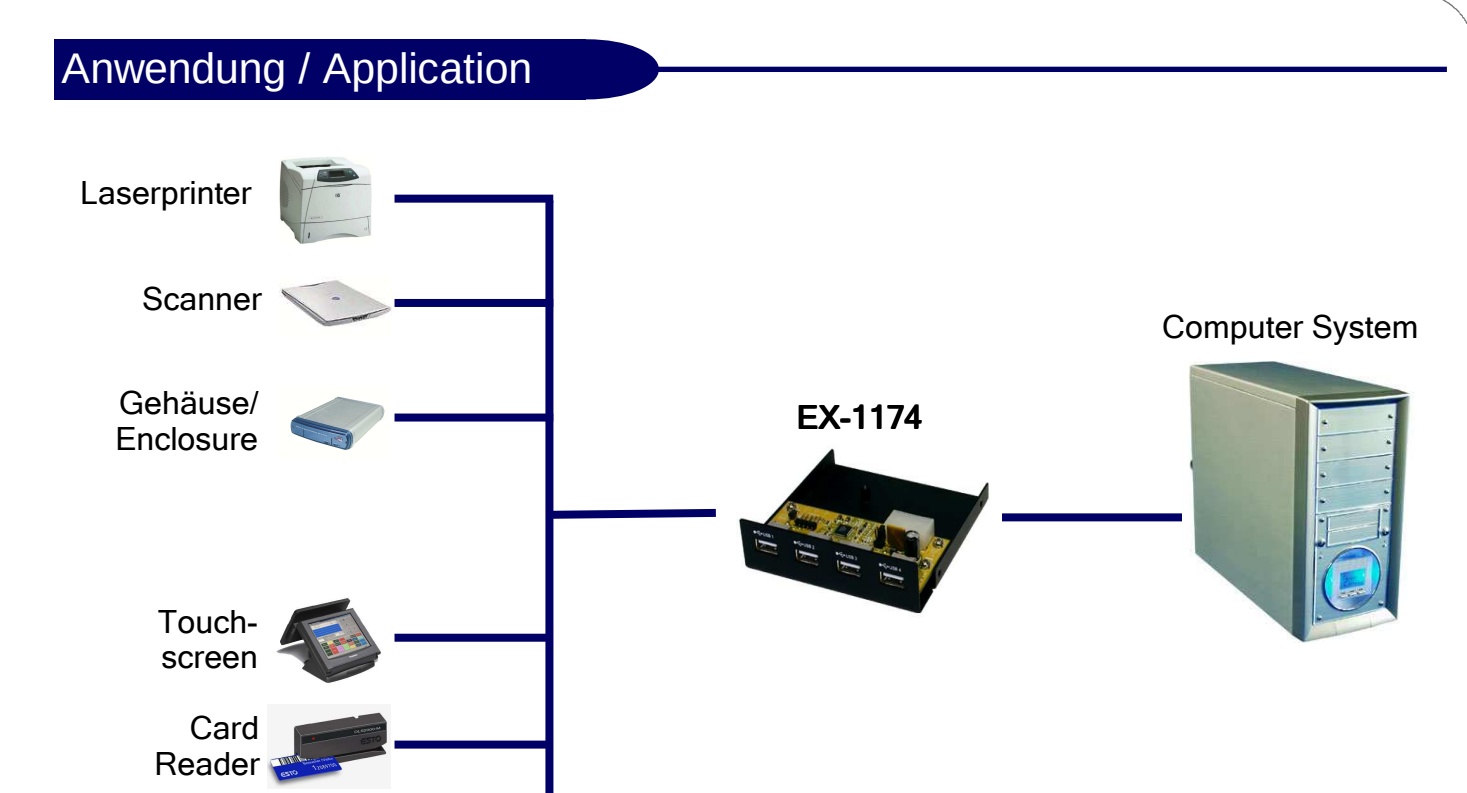





Interner USB 2.0 HUB mit 4 Ports

Internal USB 2.0 HUB with 4 Ports

Beschreibung

Mit der EX-1174 erweitern Sie einen USB 2.0 Pin-Header-Stecker des Mainboards oder von einer Erweiterungskarte um vier weitere USB 2.0 A-Ports. Die EX-1174 wird in einen freien 5 1/4“ oder 3 1/2“ Schacht vom Desktop Rechner eingebaut. Es ist somit möglich bis zu vier externe USB Peripheriegeräte an einen USB 2.0 Pin-Header-Stecker vom PC anzuschließen.

Description

The EX-1174 expand one USB 2.0 pin header connector on the motherboard or an expansion card to four USB 2.0 A-Ports. The EX1174 will be install in to a 5.25-inch and 3.5-inch bay from your computer system. It’s possible now to connect up to four external USB 2.0 peripherals devices to one USB 2.0 pin header connector from the Desktop Computer.

Merkmale

- Interner USB 2.0 HUB mit vier USB 2.0 Ports
- Automatische Erkennung der Datentransfer-Rate für die angeschlossenen Peripheriegeräte
- Unterstützt alle USB 2.0 kompatiblen Peripheriegeräte
- Stromversorgung vom Netzteil des Rechners
- Für 3.5“ und 5 1/4“ Front-Bay Einschub
- Metallgehäuse

Features

- Internal USB 2.0 HUB with four USB 2.0 ports
- Automatic recognition the data transfer rate for the attached external peripheral devices
- Support all USB 2.0 compatible devices
- Power from the computer power supply
- Support 3.5-inch and 5.25-inch Front Bay
- Metal case

Spezifikationen

- **Chip-Set:** Cypress
- **Datentransfer-Rate:** 120Mbps bis 480Mbps
- **Anschlüsse**: 1 x USB Pin-Header Upstream
4 x A-Buchse Downstream
1 x 4 Pin Molex Stromanschluss vom PC Netzteil
- **Hardwaresysteme:** USB 2.0
- **Treiber:** Benötigt keine Treiber (Standard HUB)
- **Betriebssysteme:** 98SE/ ME/ CE/ 2000/ Server(2000/ 2003/ 2008)/ XP/ Vista/ 7/ 8/ Linux/ Mac OS 10.x
- **Betriebstemperatur :** 0^0 bis 55^0 Celsius
- **Lagertemperatur:** -20^0 bis 85^0 Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** 5V
- **Gewicht**: 300g
- **Lieferumfang**: EX-1174, USB Pin-Header Kabel, Schrauben
5 1/4“ Einschub-Rahmen

Specifications

- **Chip-Set:** Cypress
- **Data transfer rate:** 120Mbps bis 480Mbps
- **Connectors**: 1 x USB pin header Upstream
4 x A-Female Downstream
1 x 4 pin Molex connector from PC Power Supply
- **Hardware system:** USB 2.0
- **Driver:** No driver necessary (Standard HUB)
- **Operating systems:** 98SE/ ME/ CE/ 2000/ Server(2000/ 2003/ 2008)/ XP/ Vista/ 7/ 8/ Linux/ Mac OS 10.x
- **Operating Temperature :** 32^0 up to 131^0 Fahrenheit
- **Storage Temperature:** -20^0 up to 167^0 Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 5V
- **Weight**: 300g
- **Packaging contents**: EX-1174, USB pin header cable, Screw
5.25-inch Front-Bay

System / OS








Geprüft / Approved




Verpackung / Packaging